

# ELRO EasyCook – Pans and Kettles

Just what you need for perfect  
cooking and frying



Easy operation

High reliability

Lowest costs  
per year

ELRO-Werke  
Wohlerstrasse 47  
5620 Bremgarten  
Schweiz  
Tel. +41 (0)56 648 91 11  
verkauf@elro.ch

ELRO Grossküchen GmbH  
Industriering Ost 31  
47906 Kempen  
Deutschland  
Tel. +49 (0)2152 20 559 - 0  
verkauf@elro-d.de

ELRO Grossküchen GmbH  
Gewerbepark Habach 19  
5321 Koppl  
Österreich  
Tel. +43 (0)6221 20499  
verkauf@elro.at

[www.elro.ch](http://www.elro.ch)

**E L R O**

**E L R O**

# ELRO – the small, but distinct difference



## Easy operation

Desired cooking and roasting temperatures are easily and quickly set with the robust control knob on ELRO EasyCook pans and kettles. During this process, the selected temperature set point is shown on the display. Afterwards, the display switches to the current temperature.

### Frying and cooking in the ELRO EasyCook pan

The EasyCook model is a genuine, well known ELRO Flexipan. Changing from the frying to the cooking mode – or vice versa – is done quickly with a simple turn of the lower control knob.


## High reliability

The ELRO EasyCook series appliances make no concessions when it comes to legendary ELRO quality. They are designed for daily, heavy use in professional kitchens. Housings made of thick high-grade stainless steel; shock-resistant pan bottoms, a water-protected control system, etc. ensure long life and reliable operation. Around the clock, day after day, year after year.

## Lowest costs per year

Exceptionally long service life and competitive pricing of the ELRO EasyCook series make these pans and kettles a smart, long-term investment for every user. In addition, maintenance and repair costs are kept at a minimum thanks to the robust design.

# Technical Data

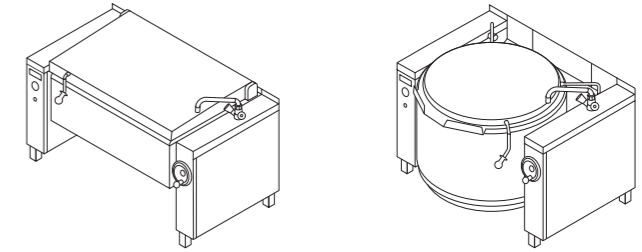

		tilting			
		Pans		Kettles	
Type		GN 2	GN 3	100 L	220 L
Dimensions/Capacity/Power					
Frying surface (mm)	width	680	1030		
	depth	550	550	530	500
Capacity (lit.)		86	131	104	221
Basin Ø (mm)				500	750
Pan depth (mm)		240	240		
External dimensions (mm)	width	1200	1550	1020	1270
	depth	800	800	800	800
	height	900	900	900	900
Connected load (kW / A)		15.1 / 21.7	23.5 / 33.9	17.1 / 25.0	27.0 / 39.0
Voltage 400 V 3LNPE 50/60 Hz		●	●	●	●
Mixer tap		●	●	●	●
ELROlit frying bottom		●	●		
Protection class IPx5		●	●	●	●
ELRO vacuum heating system				●	●
Installation types					
ELRO feet		●	●	●	●
ELRO CNS base		○	○	○	○
Concrete plinth		○	○	○	○

We reserve the right to make technical changes.

● Standard ○ Optional