




 Demand analysis
specific to operation

 Range system advice
specific to operation

 Customised
efficiency calculation

 Customised
range system design

 Installation
and start-up

 User support
by ELRO kitchen chefs

 ELRO After Sales Service
Worldwide

ELRO Cooking Island Range 600 Either you already have one – or you want one

Simple, robust and custom-built



Eight selectable
functions

Flexible component
arrangement

High Quality at
surprising price

ELRO-Werke
Wohlerstrasse 47
5620 Bremgarten
Schweiz
Tel. +41 (0)56 648 91 11
verkauf@elro.ch

ELRO Grossküchen GmbH
Industriering Ost 31
47906 Kempen
Deutschland
Tel. +49 (0)2152 20 559 - 0
verkauf@elro-d.de

ELRO Grossküchen GmbH
Gewerbepark Habach 19
5321 Koppl
Österreich
Tel. +43 (0)6221 20499
verkauf@elro.at

www.elro.ch

E L R O

E L R O

ELRO – built to your needs and for life




Induction/Infrared

Induction and infrared can be freely combined under one and the same ceramic cooking glass. Infrared provides reliable performance under continuous use, while induction offers extremely rapid heat-up with very high efficiency.



Hot cupboard

The air circulation fan guarantees a short heat-up time and even heat distribution.

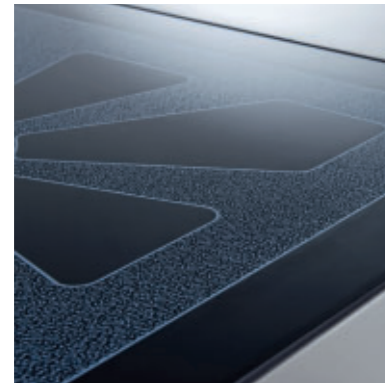


Steel hob

Multi-functional cooking plate for working with pots and pans, or direct contact cooking e.g. roasting.



Open compartment

Everything within reach: the ideal storage area for cooking utensils.

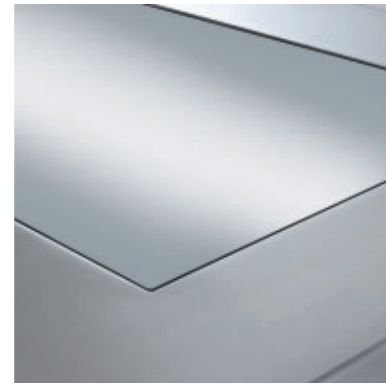

Grill/Griddle

The flush, easy to clean grill/griddle allows the precise control of each zone, and high production output even under heavy, duty use. The large fat drip tray ensures a high level of work comfort.




Easy operation

The robust control knob controls every unit directly, quickly, and precisely.



Gas hob

The intelligent solution with a water run-off to drain the gas trough guarantees easy cleaning. Twin burner technology ensures even heat distribution.

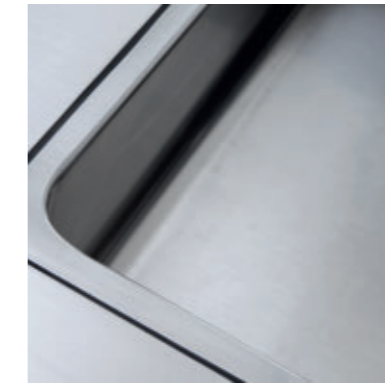

Bain-Marie

High-performance and precision controlled. Covered drain with ball valve for optimal space utilisation.



Oven

Reliable baking of the highest quality thanks to upper/lower heat and circulating air.

You decide which components you need and where you want them placed. And we build your dream range with an excellent price-performance ratio and in the best quality.

Your individual range system, your personal cost advantage.



ELRO Cooking Island Range 600 – Modules

Superstructure	Outer dimensions	Inner dimensions	Output
Ceramic cooking field with 2 cooking plates	385 x 700 mm		
Ceramic cooking field with 4 cooking plates	700 x 700 mm		
Infrared cooking fields, set of 2		2 x 270 x 270 mm	2 x 4.0 kW
Infrared cooking fields set of 2, energy saving control		2 x 270 x 270 mm	2 x 4.0 kW
Induction cooking fields, Ø 270 mm, set of 2		2 x Ø 270 mm	2 x 5.0 kW
Induction cooking fields, Ø 270 mm, set of 4		4 x Ø 270 mm	4 x 5.0 kW
Surface induction		2 x 270 x 270 mm	2 x 7.0 kW
Grill/Griddle plate 1 zone	400 x 600 mm		6.0 kW
Grill/Griddle plate 2 zones	740 x 600 mm		12.0 kW
Bain-Marie GN1/1 including bottom plate		350 x 550 x 155 mm	2.0 kW
Gas cooking field with 2 cooking plates		402 x 720 mm	
Gas cooking field with 4 cooking plates		770 x 720 mm	
Twin burner 3.5/6.0/8.5 kW			
Pillar mixer tap 3/4"			

Substructure			
Oven GN2/1, one-sided operation		562 x 708 x 365 mm	5.8 kW
Oven GN2/1, two-sided operation		562 x 720 x 365 mm	6.0 kW
Heating cupboard GN2/1, one-sided/two-sided operation		615 x 757 x 425 mm	1.0 kW
Heating cupboard GN3/1, one-sided/two-sided operation		940 x 757 x 425 mm	1.5 kW
Open compartment GN1/1, one-sided/pass-through		360 x 795 x 440 mm	
Compartment GN1/1 with door, hinges left/right, one-sided		360 x 770 x 440 mm	
Compartment GN1/1 with door, hinges left/right, pass-through		360 x 760 x 440 mm	
1 Shelf GN1/1, adjustable, 3 levels			
Open compartment GN2/1, one-sided/pass-through		565 x 795 x 440 mm	
Compartment GN2/1 with door, hinges left/right, one-sided		565 x 770 x 440 mm	
Compartment GN2/1 with door, hinges left/right, pass-through		565 x 760 x 440 mm	
1 Shelf GN2/1, adjustable, 3 levels			